







中国认可 国际互认 检测 TESTING CNAS L4743

Test Report

No. AJFS1912013478FF

Date: JAN.07, 2020

Page 1 of 6

SHAOXING BIGU TEXTILES CO., LTD.

NO.94 QISHENG ROAD YUECHENG D SHAOXING

The following sample(s) was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion. results apply to the sample as received.

Sample Description: 100% POLYESTER INHERENT FLAME RETARDANT LINEN DIMOUT FABRIC

Color: WHITE

Composition: 100%POLYESTER

Manufacturer: SHAOXING BEGOODTEX CO., LTD.

Style/Item No.: /

Test Requested:

EN 13501-1:2018 Fire classification of construction products and building elements — Part 1: Classification using data from reaction to fire tests

Test Results: -- See attached sheet -

Test Period:

Sample Receiving Date : DEC.19, 2019

Test Performing Date : DEC.19, 2019 TO JAN.02, 2020

Signed for and on behalf of SGS-CSTC Co., Ltd. Anji Branch

Allen Zou Lab Manager



AJFS1912013478F



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sps.com/en/Terms-end-Conditions for Service printer overleaf, available on request or accessible at http://www.sps.com/en/Terms-end-Conditions for Sectoral Comments at http://www.sps.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemeilication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's indiging at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not experience any transaction from exercising all their rights and obtigations under the transaction documents. This document cannot be reproduced except in full, without prior written approved the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unleavily and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention-To check the authenticity of feating / inspection report & certificate, please contact us at felephone (86-755) 830.



No. AJFS1912013478FF

Date: JAN.07, 2020

Page 2 of 6

I. Test conducted

This test is conducted as per EN 13501-1:2018 Fire classification of construction products and building elements — Part 1: Classification using data from reaction to fire tests. And the test methods as following:

- 1. EN 13823:2010+A1:2014 Reaction to fire tests for building products Building products excluding floorings exposed to the thermal attack by a single burning item.
- 2. EN ISO 11925-2:2010 Reaction to fire tests Ignitability of building products subjected to direct impingement of flame Part 2: Single-flame source test.

II. Details of classified product

a) Nature and end use application

The product "Fabric" is defined as a decorative sheet. Its classification is valid for the following end use application: Decorative fabric.

b) Description

Sample Description	Fabric
Color	Grey
Sample size	EN 13823:1500mm×1000mm&1500mm×495mm EN ISO 11925-2: 250mm×90mm
Mass per unit area	335 g/m ²
Exposed surface	Face surface

Mounting and fixing:

The test specimens are fixed mechanically in the trolley, champed at the top and the bottom, no joint in the long wing.

III. Test results

Test method	Parameter	Number of tests	Results
	FIGRA _{0.2MJ} (W/s)		9.8
	FIGRA _{0.4MJ} (W/s)		0.0
	Whether lateral flame spread (LFS) to the edge of specimen (Yes/No)	_	No
EN 13823	THR _{600s} (MJ)	3	0.2
	SMOGRA (m²/s²)		0.5
	TSP _{600s} (m ²)		7.0
	Flaming particles or droplets (Yes/No)		No

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions for federionic format documents as the first of the company of the compa

No. 301, Sunlight Road, 2 Blook, Sunlight Industry Zone, Anji County, Zhejang Province, China 313300 t (86-572) 50(8825 f (86-572) 50(8825 www.agsgroup.com.cn 中國・新江・安吉县阳光工业园二区阳光大道301号 邮编:313300 t (86-572) 50(8825 f (86-572) 50(8825 e sgs.china@sgs.com



No. AJFS1912013478FF

Date: JAN.07, 2020

Page 3 of 6

Test method	Parameter	Specimen number	Results
EN ISO 11925-2	Whether vertical flame spread (Fs) in excess of 150 mm within 60s (Yes/No)	6	No
Exposure = 30 s	Ignition of the filter paper (Yes/No)		No

IV. Classification and field of application

a) Reference of classification

This classification has been carried out in accordance with EN 13501-1:2018.

b) Classification

The product, Fabric, in relation to its reaction to fire behaviour is classified:

Fire behaviour		Smoke production			Flaming droplets	
В	_	S	1	,	d	0

Reaction to fire classification: B-s1, d0

Remark: The classes with their corresponding fire performance are given in annex A.

c) Field of application

This classification is valid for the following end use applications:

- --- With mechanically fixing
- --- No joint

This classification is valid for the following product parameters:

--- Characteristics as described in section II b) of this test reports.

Statement:

This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed wereland, available on request or accessible at http://www.sqs.com/Terms.and-Conditions.aggs.ag, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com/enrigerms-enrigerms-en-Document.aggs. Attention is drawn to the limitation of itability, indemnification and jurisdiction issues defined effect. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of items and the document of the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and colligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized except of the full control or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the samples) lessed and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone (85-755) 3007



No. AJFS1912013478FF

Date: JAN.07, 2020

Page 4 of 6

Warning:

This classification report does not represent type approval or certification of the product.

The test laboratory has, therefore, play no part in sampling the product for the test, although it holds appropriate references to the manufacturer's factory production control that is aimed to be relevant to the samples tested and that will provide for their traceability.

Annex A

Classes of reaction to fire performance for construction products excluding floorings and linear pipe thermal insulation products

Class	Test method(s)	1	Classification criteria	Additional classification	
	EN ISO 1182 a and		△T≤30°C, and △m≤50%, and t _f =0(i.e. no sustained flaming)	-	
A1	EN ISO 1716		PCS≤2.0MJ/kg ^a and PCS≤2.0MJ/kg ^{b c} and PCS≤1.4MJ/m ² ^d and PCS≤2.0MJ/kg ^e	-	
	EN ISO 1182 a or		<i>∆T</i> ≤50°C, and <i>∆m</i> ≤50%, and t _f ≤20 s	-	
A2	A2 EN ISO 1716	and	PCS≤3.0MJ/kg a and PCS≤4.0MJ/m² b and PCS≤4.0MJ/m² d and PCS≤3.0MJ/kg e	-	
	EN 13823		FIGRA≤120W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤7.5MJ</edge>	Smoke production ^f and Flaming droplets/particles ^g	
В	EN 13823	and	FIGRA≤120W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤7.5MJ</edge>	Smoke production ^f and Flaming droplets/particles ^g	
	EN ISO 11925-2 i Exposure =30s		within 60s <i>F</i> s≤150mm	Flaming droplets/particles *	
С	EN 13823	and	FIGRA≤250W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤15MJ</edge>	Smoke production ^f and Flaming droplets/particles ^g	
	EN ISO 11925-2 i Exposure=30s		Fs≤150mm within 60 s		
D	EN 13823	and	FIGRA≤750W/s	Smoke production ^f and	
	EN ISO 11925-2 i Exposure=30s		Fs≤150mm within 60 s	Flaming droplets/particles ^g	
Е	EN ISO 11925-2 i Exposure =15s		Fs≤150mm within 20 s	flaming droplets/particles h	

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions, aspy and, for electronic format documents, aspusible to Terms and Conditions for Electronic Governments at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditi

No. 301, Sunlight Road, 2 Blook, Sunlight Industry Zone, Anji County, Zhejang Province, China 313300 t (86-572) 50(825 f (86-572) 50(825 www.agsgroup.com.cn 中國 - 新江 - 安吉县阳光工业园二区阳光大造301号 邮编:313300 t (86-572) 50(825 f (86-572) 50(825 e sgs.china@ags.com.cn



No. AJFS1912013478FF

Date: JAN.07, 2020

Page 5 of 6

_	EN ISO 11925-2 ⁱ
Г	Exposure = 15 s

Fs>150mm within 20 s

- ^a For homogeneous products and substantial components of non-homogeneous products.
- ^b For any external non-substantial component of non-homogeneous products.
- ° Alternatively, any external non-substantial component having a PCS \leq 2,0 MJ/m², provided that the product satisfies the following criteria of EN 13823: FIGRA \leq 20 W/s, and LFS < edge of specimen, and THR_{600s} \leq 4,0 MJ, and s1, and d0.
- ^d For any internal non-substantial component of non-homogeneous products.
- e For the product as a whole.
- f s1 = SMOGRA \leq 30m²/s² and TSP $_{600s}$ \leq 50m² ; s2 = SMOGRA \leq 180m²/s² and TSP $_{600s}$ \leq 200m²; s3 = not s1 or s2
- ⁹ d0 = No flaming droplets/ particles in EN 13823 within 600 s;
- d1 = no flaming droplets/ particles persisting longer than 10 s in EN 13823 within 600 s;
- d2 = not d0 or d1.

Ignition of the paper in EN ISO 11925-2 results in a d2 classification.

- h Pass = no ignition of the paper (no classification);
- Fail = ignition of the paper (d2 classification).
- Under conditions of surface flame attack and, if appropriate to the end-use application of the product, edge flame attack.

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sps.com/en/Terms-end-Conditions for Service printer overleaf, available on request or accessible at http://www.sps.com/en/Terms-end-Conditions for Sectoral Comments at http://www.sps.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemeilication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's indiging at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not experience any transaction from exercising all their rights and obtigations under the transaction documents. This document cannot be reproduced except in full, without prior written approved the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unleavily and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention-To check the authenticity of feating / inspection report & certificate, please contact us at felephone (86-755) 830.




No. AJFS1912013478FF

Date: JAN.07, 2020

Page 6 of 6

Photo Appendix:

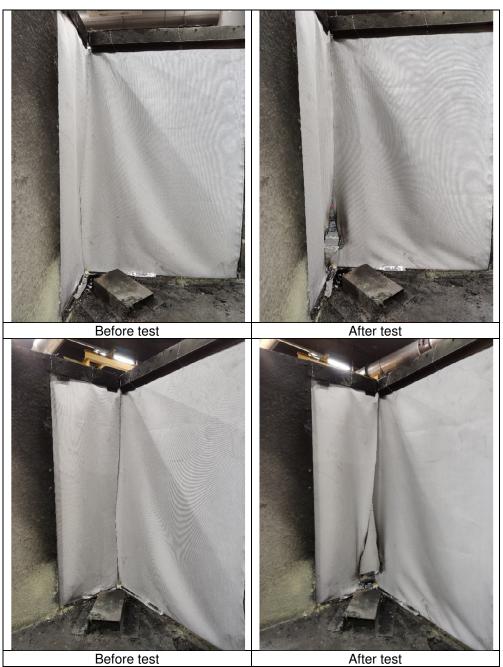

SGS authenticate the photo on original report only

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sp.com/en/Terms-and-Conditions for electronic floremat documents as http://www.sp.com/en/Terms-and-Conditions for electronic floremate documents as http://www.sp.com/en/Terms-and-Conditions/Terms-e-Occument.aspx Attention is drawn to the limitation of liability, indemeilication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's indiging at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not experience parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or fasification of the content of appearance of this document is unleavily and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and as ample(s) are retained for 30 days only.

**Attention.75 c heack the authenticity of testing / inspection report & certificate, please contact us at Lelegibone (88-755) 330.